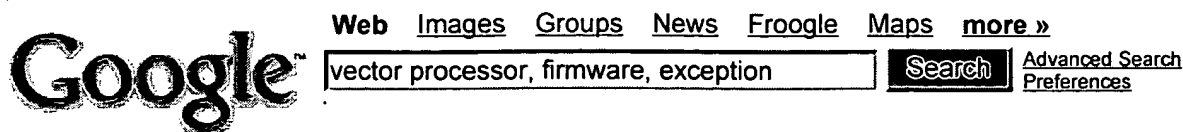


[Sign in](#)

Web Results 1 - 100 of about 134,000 English pages for **vector processor, firmware, exception**. (0.33 seconds)

Analog Devices : Embedded Processing & DSP : Technical Support ...

22833 Some fract16 **vector** functions require 32-bit alignment. DSP Family: Blackfin **Processor**. First Discovered In: VDSP++ 3.5. Tool: Run Time Libraries ...
www.analog.com/processors/cda/epTASearchResult/0,3001,,00.html - 947k -
[Cached](#) - [Similar pages](#)

Embedded Intel® Solutions

In either mode, the Debug Handler takes over the reset **vector** by locking it in cache. While the Intel XScale technology-based **processor** provides a 32-way ...
www.embeddedintel.com/display.php?article=32 - 21k - [Cached](#) - [Similar pages](#)

How to Incorporate Intel® Virtualization Technology into an ...

The VMM uses the virtualization **vector** to configure the **processor** to use two of the ... VT-i includes additions to the PAL **firmware** layer that provide a ...
www.intel.com/cd/ids/developer/asmo-na/eng/dc/itanium/275316.htm - 28k -
[Cached](#) - [Similar pages](#)

[PDF] Itanium™ Processor Floating-point Software Assistance and ...

File Format: PDF/Adobe Acrobat

The floating-point **exception** priority on the Itanium **processor** is the following: ... kernel, reached via the floating-point fault **vector**, for an Itanium ...
www.intel.com/design/itanium/downloads/24541501.pdf - [Similar pages](#)

[PDF] PA-RISC 2.0 Firmware Architecture Reference Specification

File Format: PDF/Adobe Acrobat - [View as HTML](#)

With the single **exception** of. the Initial Memory Module (IMM), whose SPA space must remain at 0x00000000 ... The Interruption **Vector** Table and the **processor** ...
<ftp.parisc-linux.org/docs/arch/pdc20-v1.0-Ch6-OS.pdf> - [Similar pages](#)

[PDF] PA-RISC 2.0 Firmware Architecture Reference Specification

File Format: PDF/Adobe Acrobat - [View as HTML](#)

The Interruption **Vector** Table (IVT) is defined by the caller at entry. ... Required for **processor** whose IODC **firmware** require allocated data storage; ...
<ftp.parisc-linux.org/docs/arch/pdc20-v0.36-Ch2-procs.pdf> - [Similar pages](#)

[PDF] Introduction

File Format: PDF/Adobe Acrobat - [View as HTML](#)

If VM is present, the **processor's** VBR (**vector** base register) points to a special **Exception Vector** Table which must never. be modified. ...
developer.apple.com/technotes/dv/pdf/dv_04.pdf - [Similar pages](#)

Second nearest-neighbor communication network for synchronous ...

A synchronous **vector processor** SVP device having a plurality of one-bit ... the master controller logic and programs are implemented on chip in **firmware**. ...
www.freepatentsonline.com/5163120.html - 233k - [Cached](#) - [Similar pages](#)

Apparatus and method for synchronizing audio and video frames in ...

The multimedia signal **processor** 104 is controlled by **firmware** including a vectorized-DSP **firmware** library 804 which executes on the **vector processor** 206 and ...
www.freepatentsonline.com/5949410.html - 74k - [Cached](#) - [Similar pages](#)
[\[More results from www.freepatentsonline.com \]](#)